



Multi-Zone Systems

MXS series

OUTDOOR UNITS

Up to 20.2 SEER | Up to 12.5 HSPF

MULTI-ZONE SYSTEMS

Model		2MXS18NMVJU		3MXS24RMVJU		4MXS36RMVJU		5MXS48TVJU	
		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity Rated	kW	21,000	25,000	30,000	36,000	38,000	43,000	47,000	48,500
COP Rated (Min. - Max.)		—		4.1		—		3.2 - 4.6	
EER Rated (Min. - Max.)		9.5 - 12.5		—		9.7 - 12.7		—	
SEER / HSPF		See Performance Table below							
Compressor	Motor Output	W		1,100		1,920		3,000	
Refrigerant	Type	R-410A							
	Charge	lbs. (kg)		3.86 (1.75)		6.17 (2.8)		8.60 (3.9)	
Airflow Rate	H	cfm		2,150 (60.9)		2,179 (61.7)		2,094 (59.3)	
	M	m³/min		2,150 (60.9)		2,179 (61.7)		2,094 (59.3)	
	L			1,953 (55.3)		1,119 (31.7)		1,981 (56.1)	
Fan	Motor Output	W		56		51		75	
	Running Current	A		H: 0.29 / M: 0.29 / L: 0.25		H: 0.29 / M: 0.29 / L: 0.05		H: 0.28 / M: 0.28 / L: 0.26	
	Power Consumption	W		H: 65 / M: 65 / L: 58		H: 66 / M: 66 / L: 12		H: 63 / M: 63 / L: 59	
Starting Current		A		14.0		15.5		17.5	
Dimension (H x W x D)		in. (mm)		28-15/16 x 34-1/4 x 12-5/8 (735 x 870 x 320)				34-1/4 x 43-5/16 x 18-1/8 (870 x 1,100 x 460)	
Weight		lbs. (kg)		123 (56)		137 (62)		139 (63)	
Piping Connections	Liquid	in. (mm)		Ø 1/4 x 2 (Ø 6.4 x 2)		Ø 1/4 x 3 (Ø 6.4 x 3)		Ø 1/4 x 4 (Ø 6.4 x 4)	
	Gas			Ø 3/8 x 1, Ø 1/2 x 1 (Ø 9.5 x 2, Ø 12.7 x 1)		Ø 3/8 x 1, Ø 1/2 x 2 (Ø 9.5 x 1, Ø 12.7 x 2)		Ø 3/8 x 1, Ø 1/2 x 2, Ø 5/8 x 1 (Ø 9.5 x 1, Ø 12.7 x 2, Ø 15.9 x 1)	
	Drain			Ø 11/16 (Ø 18.0)		Ø 11/16 (Ø 17.5)		Ø 1 (Ø 25)	
Max. Interunit Piping Length		ft. (m)		164 (50) (for Total of Each Room) 82 (25) (for One Room)		230 (70) (for Total of Each Room) 82 (25) (for One Room)		262 (80) (for Total of Each Room) 98 (30) (for One Room)	
Amount of Additional Charge of Refrigerant		oz/ft. (g/m)		0.21 (20) (98-3/8 ft (30 m) or more)		0.21 (20) (131-5/8 ft (40 m) or more)			
Max. Installation Height Difference		ft. (m)		49-1/4 (15) (between Indoor Unit and Outdoor Unit) 24-5/8 (7.5) (between Indoor Units)					
Operating Range - Cooling		°F DB		14° - 115°F					
Operating Range - Heating		°F WB		5° - 60°F					
ENERGY STAR® Certified*						NO		NO	

* Proper sizing and installation of equipment is critical to achieving optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

Outdoor Unit	Power Supply				Compressor		OFM	
	Hz - Volts	Voltage Range	MCA	MOCP	MSC	RLA	W	FLA
2MXS18NMVJU	60 - 208	Min. 187 V Max. 253 V	15.80	20	14.0	14.0	56	0.37
	60 - 230							
3MXS24RMVJU	60 - 208	Min. 187 V Max. 253 V	21.9	25	15.5	15.5	73	0.25
	60 - 230							
4MXS36RMVJU	60 - 208	Min. 187 V Max. 253 V	23.9	25	17.5	17.5	122	0.42
	60 - 230							
5MXS48TVJU	60 - 208	Min. 187 V Max. 253 V	33.2	35	27	27	84	1.15
	60 - 230							

Performance					
MXS series Performance	Model	Connected to	SEER	EER	HSPF
		2MXS18NMVJU	Non-Ducted	18.9	12.5
2MXS18NMVJU		Ducted	14	9.5	8.2
2MXS18NMVJU		Mixed	16.45	11	9.45
3MXS24RMVJU		Non-Ducted	18	12.7	12.5
3MXS24RMVJU		Ducted	14	9.7	8.2
3MXS24RMVJU		Mixed	15.95	11.2	10.35
4MXS36RMVJU		Non-Ducted	17.7	9.2	12.2
4MXS36RMVJU		Ducted	14	7.9	8.2
4MXS36RMVJU		Mixed	15.85	8.55	10.2
5MXS48TVJU		Non-Ducted	20.2	10.5	11.1
5MXS48TVJU		Ducted	15.3	8.6	9.85
5MXS48TVJU		Mixed	17.75	9.55	8.6



Multi-Zone Systems

EMURA Wall-Mounted

INDOOR UNITS

FTXR_TVJU (W/S)

Pure matte white finish



Silver finish



Wireless I/R controller



Model			FTXR09TVJUW (White) FTXR09TVJUS (Silver)		FTXR12TVJUW (White) FTXR12TVJUS (Silver)		FTXR18TVJUW (White) FTXR18TVJUS (Silver)	
			Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			9 kBtu/h Class		12 kBtu/h Class		18 kBtu/h Class	
Front Panel Color			White or Silver		White or Silver		White or Silver	
Airflow Rate	H	cfm (m ³ /min)	279 (7.9)	346 (9.8)	335 (9.5)	395 (11.2)	350(9.9)	413 (11.7)
	M		208 (5.9)	258 (7.3)	219 (6.2)	290 (8.2)	275 (7.8)	332 (9.4)
	L		162 (4.6)	201 (5.7)	169 (4.8)	226 (6.4)	226 (6.4)	275 (7.8)
	SL		134 (3.8)	117 (3.3)	131 (3.7)	131 (3.7)	208 (5.9)	208 (5.9)
Fan	Motor Output	W	29					
	Speed	Steps	5 Steps, Quiet, Auto					
Air Direction Control			Right, Left, Horizontal, Downward					
Air Filter			Removable, Washable, Mildew Proof					
Power Consumption (Rated)		W	13	26	26	38	28	42
Dimensions (H x W x D)		in. (mm)	11-15/16 x 39-5/16 x 8-3/8 (303 x 998 x 212)					
Weight (Mass)		lbs. (kg)	27 (12)					
Sound Pressure Level	H / M / L / SL	dB(A)	38 / 32 / 25 / 19	41 / 34 / 28 / 19	45 / 34 / 26 / 20	45 / 37 / 29 / 20	46 / 40 / 35 / 30	47 / 41 / 35 / 30
Piping Connections	Liquid	in.(mm)	Ø 1/4 (Ø 6.4)					
	Gas		Ø 3/8 (Ø 9.5)			Ø 1/2 (Ø 12.7)		
	Drain		Ø 11/16 (Ø 18)					

MULTI-ZONE SYSTEMS

Multi-Zone Systems INDOOR UNITS CTXS_LVJU and FTXS_LVJU




MULTI-ZONE SYSTEMS

Model			CTXS07LVJU		FTXS09LVJU		FTXS12LVJU	
			Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			7 kBtu/h Class		9 kBtu/h Class		12 kBtu/h Class	
Front Panel Color			White					
Airflow Rate	H	cfm (m ³ /min)	332 (9.4)	350 (9.9)	381 (10.8)	420 (11.9)	403 (11.4)	438 (12.4)
	M		261 (7.4)	290 (8.2)	279 (7.9)	321 (9.1)	307 (8.7)	335 (9.5)
	L		194 (5.5)	233 (6.6)	194 (5.5)	233 (6.6)	205 (5.8)	240 (6.8)
	SL		145 (4.1)	219 (6.2)	145 (4.1)	219 (6.2)	155 (4.4)	212 (6.0)
Fan	Motor Output	W	23					
	Speed	Steps	5 Steps, Quiet, Auto					
Air Direction Control			Right, Left, Horizontal, Downward					
Air Filter			Removable, Washable, Mildew Proof					
Power Consumption (Rated)		W	18	21	18	21	26	28
Dimensions (H x W x D)		in. (mm)	11-5/8 x 31-1/2 x 8-7/16 (295 x 800 x 215)					
Weight (Mass)		lbs. (kg)	20 (9)				22 (10)	
Sound Pressure Level	H / M / L / SL	dB(A)	38 / 32 / 25 / 22	38 / 33 / 28 / 25	41 / 33 / 25 / 22	42 / 35 / 28 / 25	45 / 37 / 29 / 23	45 / 39 / 29 / 26
Piping Connections	Liquid	in. (mm)	Ø 1/4 (6.4)					
	Gas	in. (mm)	Ø 3/8 (9.5)					
	Drain	in. (mm)	Ø 5/8 (16.0)					

Model			FTXS15LVJU		FTXS18LVJU		FTXS24LVJU	
			Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			15 kBtu/h Class		18 kBtu/h Class		24 kBtu/h Class	
Front Panel Color			White					
Airflow Rate	H	cfm (m ³ /min)	568 (16.1)	593 (16.8)	583 (16.5)	625 (17.7)	643 (18.2)	699 (19.8)
	M		477 (13.5)	505 (14.3)	484 (13.7)	526 (14.9)	494 (14.0)	572 (16.2)
	L		385 (10.9)	417 (11.8)	385 (10.9)	431 (12.2)	350 (9.9)	445 (12.6)
	SL		360 (10.2)	371 (10.5)	360 (10.2)	399 (11.3)	328 (9.3)	403 (11.4)
Fan	Motor Output	W	48					
	Speed	Steps	5 Steps, Quiet, Auto					
Air Direction Control			Right, Left, Horizontal, Downward					
Air Filter			Removable, Washable, Mildew Proof					
Power Consumption (Rated)		W	38 - 38				69 - 68	
Dimensions (H x W x D)		in. (mm)	13-3/8 x 41-5/16 x 9-3/4 (340 x 1,050 x 248)					
Weight (Mass)		lbs. (kg)	31 (14)					
Sound Pressure Level	H / M / L / SL	dB(A)	45 / 40 / 35 / 32	43 / 38 / 33 / 30	46 / 41 / 36 / 33	45 / 40 / 35 / 32	51 / 44 / 37 / 34	48 / 42 / 37 / 34
Piping Connections	Liquid	in. (mm)	Ø 1/4 (6.4)					
	Gas	in. (mm)	Ø 1/2 (12.7)				Ø 5/8 (15.9)	
	Drain	in. (mm)	Ø 5/8 (16)					

Multi-Zone Systems INDOOR UNITS FDXS_LVJU and CDXS

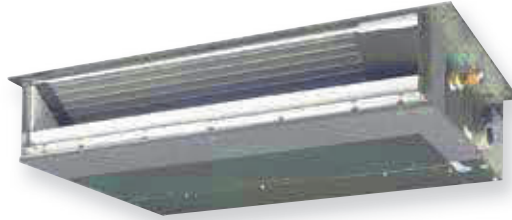

Model			CDXS07LVJU		FDXS09LVJU		FDXS12LVJU	
			Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			7 kBtu/h Class		9 kBtu/h Class		12 kBtu/h Class	
External Static Pressure		inAq (Pa)	0.12 (30)		0.12 (30)		0.12 (30)	
Airflow Rate	H	cfm (m ³ /min)	305 (8.6)	305 (8.6)	305 (8.6)	305 (8.6)	305 (8.6)	305 (8.6)
	M		280 (7.9)	280 (7.9)	280 (7.9)	280 (7.9)	280 (7.9)	280 (7.9)
	L		260 (7.4)	260 (7.4)	260 (7.4)	260 (7.4)	260 (7.4)	260 (7.4)
	SL		235 (6.7)	235 (6.7)	235 (6.7)	235 (6.7)	235 (6.7)	235 (6.7)
Fan	Motor Output	W	62					
	Speed	Steps	5 Steps, Quiet, Auto					
Air Filter			Removable, Washable, Mildew Proof					
Power Consumption (Rated)		W	72					
Dimensions (H x W x D)		in. (mm)	7-7/8 x 27-9/16 x 24-7/16 (200 x 700 x 620)					
Weight (Mass)		lbs. (kg)	47 (21)					
Sound Pressure Level	H / M / L	dB(A)	35 / 33 / 31					
Piping Connections	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)					
	Gas		Ø 3/8 (Ø 9.5)					
	Drain		Ø 25/32 (Ø 20)					


Model			CDXS15LVJU		CDXS18LVJU		CDXS24LVJU	
			Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			15 kBtu/h Class		18 kBtu/h Class		24 kBtu/h Class	
External Static Pressure		inAq (Pa)	0.16 (40)		0.16 (40)		0.16 (40)	
Airflow Rate	H	cfm (m ³ /min)	424 (12.0)	424 (12.0)	424 (12.0)	424 (12.0)	565 (16)	565 (16)
	M		388 (11.0)	388 (11.0)	388 (11.0)	388 (11.0)	523 (14.8)	523 (14.8)
	L		353 (10.0)	353 (10.0)	353 (10.0)	353 (10.0)	477 (13.5)	477 (13.5)
	SL		297 (8.4)	297 (8.4)	297 (8.4)	297 (8.4)	395 (11.2)	395 (11.2)
Fan	Motor Output	W	130					
	Speed	Steps	5 Steps, Quiet, Auto					
Air Filter			Removable, Washable, Mildew Proof					
Power Consumption (Rated)		W	172			160		
Dimensions (H x W x D)		in. (mm)	7-7/8 x 35-7/16 x 24-7/16 (200 x 900 x 620)			7-7/8 x 43-5/16 x 24-7/16 (200 x 1,100 x 620)		
Weight		lbs. (kg)	60 (27)			66 (30)		
Sound Pressure Level	H / M / L / SL	dB(A)	37 / 35 / 33 / 31			38/36/34/32		
Piping Connections	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)					
	Gas		Ø 1/2 (Ø 12.7)					
	Drain		Ø 1-1/32 (Ø 26) Ø 25/32 (Ø 20))		Ø 1-1/32 (Ø 26) Ø 25/32 (Ø 20))		Ø 5/8 (Ø 15.8) Ø 1-1/32 (Ø 26) Ø 25/32 (Ø 20))	

Multi-Zone Systems

INDOOR UNITS

FDMQ_RVJU

Ducted Concealed

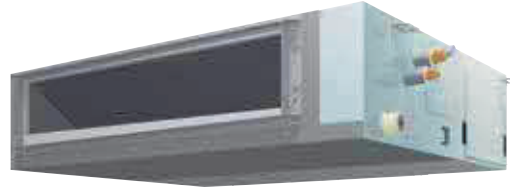

MULTI-ZONE SYSTEMS

Model			FDMQ09RVJU		FDMQ12RVJU		FDMQ15RVJU	
			Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			9 kBtu/h Class		12 kBtu/h Class		15 kBtu/h Class	
External Static Pressure		inAq (Pa)	0.6 (150)					
Airflow Rate	H	cfm (m³/min)	343 (9.7)	343 (9.7)	392 (11.1)	392 (11.1)	516 (19.1)	516 (19.1)
	M		290 (8.2)	290 (8.2)	332 (9.4)	332 (9.4)	438 (12.4)	438 (12.4)
	L		240 (6.8)	240 (6.8)	275 (7.8)	275 (7.8)	360 (10.2)	360 (10.2)
	SL		—	—	—	—	—	—
Fan	Motor Output	W	—					
	Speed	Steps	—					
Air Filter			—					
Power Consumption (Rated)		W	—					
Dimensions (H × W × D)		in. (mm)	9-5/8 × 27-9/16 × 31-1/2 (245 × 700 × 800)			9-5/8 × 39-3/8 × 31-1/2 (245 × 1,000 × 800)		
Weight (Mass)		Lbs (kg)	64 (29)			77 (35)		
Sound Pressure Level	H / M / L	dB(A)	32		33		34	
	Liquid	in. (mm)	—					
Gas	Ø 3/8 (Ø 9.5)			Ø 1/2 (Ø 12.7)				
Drain	Ø 1 (25.0)							

Model			FDMQ18RVJU		FDMQ24RVJU	
			Cooling	Heating	Cooling	Heating
Nominal Capacity			18 kBtu/h Class		24 kBtu/h Class	
External Static Pressure		inAq (Pa)	0.6 (150)			
Airflow Rate	H	cfm (m³/min)	675 (19.1)	675 (19.1)	798 (22.6)	798 (22.6)
	M		572 (16.2)	572 (16.2)	678 (19.2)	678 (19.2)
	L		473 (13.4)	473 (13.4)	558 (15.8)	558 (15.8)
	SL		—	—	—	—
Fan	Motor Output	W	—			
	Speed	Steps	—			
Air Filter			—			
Power Consumption (Rated)		W	—			
Dimensions (H × W × D)		in. (mm)	9-5/8 × 39-3/8 × 31-1/2 (245 × 1,000 × 800)			
Weight		Lbs (kg)	82 (37)			
Sound Pressure Level	H	dB(A)	35		40	
	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)			
Gas	Ø 1/2 (Ø 12.7)		Ø 5/8 (Ø 15.9)			
Drain	Ø 1 (25.0)					

Multi-Zone Systems

INDOOR UNITS

FVXS_NVJU



MULTI-ZONE SYSTEMS


Model			FVXS09NVJU		FVXS12NVJU		FVXS15NVJU		FVXS18NVJU	
			Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Nominal Capacity			9 kBtu/h Class		12 kBtu/h Class		15 kBtu/h Class		18 kBtu/h Class	
Front Panel Color			White							
Airflow Rate	H	cfm (m ³ /min)	290 (8.2)	311 (8.8)	300 (8.5)	332 (9.4)	378 (10.7)	417 (11.8)	378 (10.7)	417 (11.8)
	M		230 (6.5)	244 (6.9)	237 (6.7)	258 (7.3)	325 (9.2)	357 (10.1)	325 (9.2)	357 (10.1)
	L		169 (4.8)	177 (5.0)	173 (4.9)	184 (5.2)	275 (7.8)	300 (8.5)	275 (7.8)	300 (8.5)
	SL		145 (4.1)	155 (4.4)	159 (4.5)	166 (4.7)	233 (6.6)	251 (7.1)	233 (6.6)	251 (7.1)
Fan	Motor Output	W	12.3		13.4		23.3			
	Speed	Steps	5 Steps, Quiet, Auto							
Air Direction Control			Right, Left, Horizontal, Downward							
Air Filter			Removable, Washable, Mildew Proof							
Power Consumption (Rated)		W	15	17	15	17	27	34 - 34	—	—
Dimensions (H x W x D)		in. (mm)	23-5/8 x 27-9/16 x 8-1/4 (600 x 700 x 210)							
Weight (Mass)		lbs. (kg)	31 (14)							
Sound Pressure Level	H / M / L / SL	dB(A)	38 / 32 / 26 / 23		39 / 33 / 27 / 24		44 / 40 / 36 / 32	45 / 40 / 36 / 32	44 / 40 / 36 / 32	45 / 40 / 36 / 32
Piping Connections	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)							
	Gas		Ø 3/8 (Ø 9.5)				Ø 1/2 (Ø 12.7)			
	Drain		Ø 13/16 (Ø 20)							

VISTA Ceiling Cassette

Multi-Zone Systems

INDOOR UNITS

FFQ_Q2VJU

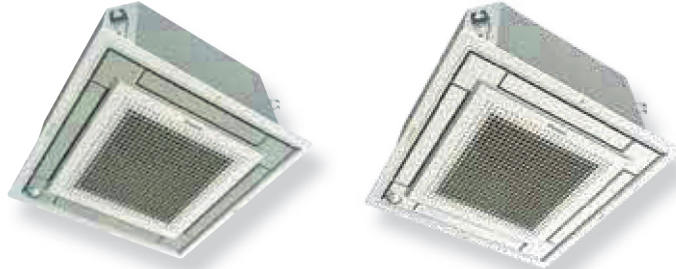

MULTI-ZONE SYSTEMS

Model			FFQ09Q2VJU		FFQ12Q2VJU	
			Cooling	Heating	Cooling	Heating
Nominal Capacity			9 kBtu/h Class		12 kBtu/h Class	
Airflow Rate	H	cfm (m ³ /min)	378 (10.7)	399 (11.3)	406 (11.5)	427 (12.1)
	M		339 (9.6)	357 (10.1)	353 (10.0)	371 (10.5)
	L		268 (7.6)	282 (8.0)	268 (7.6)	282 (8.0)
Fan	Speed	Steps	Turbo fan, 3 steps			
Air Direction Control			Up, Down			
Dimensions (H × W × D)		in. (mm)	10-1/4 × 22-5/8 × 22-5/8 (260 × 575 × 575)			
Weight		lbs. (kg)	36 (16)			
Sound Pressure Level	H / M / L	dB(A)	38 / 35 / 29		39 / 36 / 30	
Heat Insulation			Both Liquid and Gas Pipes			
Piping Connections	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)			
	Gas		Ø 3/8 (Ø 9.5)			
	Drain		Ø 1-1/32 (Ø 26)			

Model			FFQ15Q2VJU		FFQ18Q2VJU	
			Cooling	Heating	Cooling	Heating
Nominal Capacity			15 kBtu/h Class		18 kBtu/h Class	
Airflow Rate	H	cfm (m ³ /min)	420 (11.9)	441 (12.5)	448 (12.7)	498 (14.1)
	M		367 (10.4)	385 (10.9)	378 (10.7)	420 (11.9)
	L		293 (8.3)	307 (8.7)	275 (7.8)	30 (8.7)
Fan	Speed	Steps	Turbo fan, 3 steps			
Air Direction Control			Up, Down			
Dimensions (H × W × D)		in. (mm)	10-1/4 × 22-5/8 × 22-5/8 (260 × 575 × 575)			
Weight		lbs. (kg)	36 (16)		39 (17.5)	
Sound Pressure Level	H / M / L	dB(A)	40 / 37 / 31		44 / 40 / 32	
Piping Connections	Liquid	in. (mm)	Ø 1/4 (Ø 6.4)			
	Gas		Ø 1/2 (Ø 12.7)			
	Drain		Ø 1-1/32 (Ø 26)			

Multi-Zone Combinations

_MXL__QMVJU / _MXL__RMVJU / 4MXL36TVJU / _MXS__NMVJU / _MXS__RMVJU

MAX: 24K BTU/H 2MXL18 / 2MXS18	MAX: 39K BTU/H 3MXL24 / 3MXS24		MAX: 48K BTU/H 4MXL36/4MXS36				
2 Zone	2 Zone	3 Zone	2 Zone	3 Zone		4 Zone	
07+07	07+07	07+07+07	07+07	07+07+07	09+09+15	07+07+07+07	07+09+09+18
07+09	07+09	07+07+09	07+09	07+07+09	09+09+18	07+07+07+09	07+09+12+12
07+12	07+12	07+07+12	07+12	07+07+12	09+09+24	07+07+07+12	07+09+12+15
07+15	07+15	07+07+15	07+15	07+07+15	09+12+12	07+07+07+15	07+09+12+18
09+09	07+18	07+07+18	07+18	07+07+18	09+12+15	07+07+07+18	07+09+15+15
09+12	09+09	07+09+09	07+24	07+07+24	09+12+18	07+07+07+24	07+12+12+12
09+15	09+12	07+09+12	09+09	07+09+09	09+12+24	07+07+09+09	07+12+12+15
12+12	09+15	07+09+15	09+12	07+09+12	09+15+15	07+07+09+12	09+09+09+09
	09+18	07+09+18	09+15	07+09+15	09+15+18	07+07+09+15	09+09+09+12
	12+12	07+12+12	09+18	07+09+18	09+15+24	07+07+09+18	09+09+09+15
	12+15	07+12+15	09+24	07+09+24	09+18+18	07+07+09+24	09+09+09+18
	12+18	07+12+18	12+12	07+12+12	12+12+12	07+07+12+12	09+09+12+12
	15+15	07+15+15	12+15	07+12+15	12+12+15	07+07+12+15	09+09+12+15
	15+18	09+09+09	12+18	07+12+18	12+12+18	07+07+12+18	09+09+12+18
	18+18	09+09+12	12+24	07+12+24	12+12+24	07+07+15+15	09+09+15+15
		09+09+15	15+15	07+15+15	12+15+15	07+07+15+15	09+12+12+12
		09+09+18	15+18	07+15+18	12+15+18	07+09+09+09	09+12+12+15
		09+12+12	15+24	07+18+18	12+18+18	07+09+09+12	12+12+12+12
		09+12+15	18+18	09+09+09	15+15+15	07+09+09+15	
		09+12+18	18+24	09+09+12	15+15+18		
		09+15+15	24+24				
		12+12+12					
		12+12+15					

AHRI CERTIFIED REF #	MODEL	INDOOR TYPE	EER	SEER	HSPF
8849534	2MXL18QMVJU	Ducted Indoor Units	10.1	14	8.2
8849535	2MXL18QMVJU	Non-Ducted Indoor Units	12.7	17	10.3
8849536	2MXL18QMVJU	Mixed Ducted and Non-ducted Indoor Units	11.4	15.5	9.25
8103477	2MXS18NMVJU	Ducted Indoor Units	9.5	14	8.2
8103542	2MXS18NMVJU	Non-Ducted Indoor Units	12.5	18.9	10.7
8104492	2MXS18NMVJU	Mixed Ducted and Non-ducted Indoor Units	11	16.45	9.45
201851578	3MXL24RMVJU	Ducted Indoor Units	9.9	14	8.2
201851577	3MXL24RMVJU	Non-Ducted Indoor Units	12.7	17.9	12.5
201851582	3MXL24RMVJU	Mixed Ducted and Non-ducted Indoor Units	11.3	15.95	10.35

Multi-Zone Combinations

5MXS48TVJU

MAX: 58K BTU/H 5MXS48								
2 Zone	3 Zone		4 Zone			5 Zone		
07+07	07+07+07	09+12+12	07+07+07+07	07+09+12+15	09+09+12+18	07+07+07+07+07	07+07+09+15+15	09+09+09+12+15
07+09	07+07+09	09+12+15	07+07+07+09	07+09+12+18	09+09+12+24	07+07+07+07+09	07+07+09+15+18	09+09+09+12+18
07+12	07+07+12	09+12+18	07+07+07+12	07+09+12+24	09+09+15+15	07+07+07+07+12	07+07+12+12+12	09+09+09+15+15
07+15	07+07+15	09+12+24	07+07+07+15	07+09+15+15	09+09+15+18	07+07+07+07+15	07+07+12+12+15	09+09+12+12+12
07+18	07+07+18	09+15+15	07+07+07+18	07+09+15+18	09+09+15+24	07+07+07+07+18	07+07+12+12+18	09+09+12+12+15
07+24	07+07+24	09+15+18	07+07+07+24	07+09+15+24	09+09+18+18	07+07+07+07+24	07+09+09+09+09	09+12+12+12+12
09+09	07+09+09	09+15+24	07+07+09+09	07+09+18+18	09+12+12+12	07+07+07+09+09	07+09+09+09+12	
09+12	07+09+12	09+18+18	07+07+09+12	07+09+18+24	09+12+12+15	07+07+07+09+12	07+09+09+09+15	
09+15	07+09+15	09+18+24	07+07+09+15	07+12+12+12	09+12+12+18	07+07+07+09+15	07+09+09+09+18	
09+18	07+09+18	09+24+24	07+07+09+18	07+12+12+15	09+12+12+24	07+07+07+09+18	07+09+09+09+24	
09+24	07+09+24	12+12+12	07+07+09+24	07+12+12+18	09+12+15+15	07+07+07+09+24	07+09+09+12+12	
12+12	07+12+12	12+12+15	07+07+12+12	07+12+12+24	09+12+15+18	07+07+07+12+12	07+09+09+12+15	
12+15	07+12+15	12+12+18	07+07+12+15	07+12+15+15	09+12+18+18	07+07+07+12+15	07+09+09+12+18	
12+18	07+12+18	12+12+24	07+07+12+18	07+12+15+18	09+15+15+15	07+07+07+12+18	07+09+09+15+15	
12+24	07+12+24	12+15+15	07+07+12+24	07+12+15+24	09+15+15+18	07+07+07+12+24	07+09+09+15+18	
15+15	07+15+15	12+15+18	07+07+15+18	07+12+18+18	12+12+12+12	07+07+07+15+15	07+09+12+12+12	
15+18	07+15+18	12+15+24	07+07+15+15	07+15+15+15	12+12+12+15	07+07+07+15+18	07+09+12+12+15	
15+24	07+15+24	12+18+18	07+07+15+24	07+15+15+18	12+12+12+18	07+07+07+18+18	07+09+12+12+18	
18+18	07+18+18	12+18+24	07+07+18+18	07+15+18+18	12+12+15+15	07+07+09+09+09	07+09+12+15+15	
18+24	07+18+24	15+15+15	07+07+18+24	09+09+09+09	12+12+15+18	07+07+09+09+12	07+12+12+12+12	
24+24	07+24+24	15+15+18	07+09+09+09	09+09+09+12	12+15+15+15	07+07+09+09+15	07+12+12+12+15	
	09+09+09	15+15+24	07+09+09+12	09+09+09+15		07+07+09+09+18	09+09+09+09+09	
	09+09+12	15+18+18	07+09+09+15	09+09+09+18		07+07+09+09+24	09+09+09+09+12	
	09+09+15	15+18+24	07+09+09+18	09+09+09+24		07+07+09+12+12	09+09+09+09+15	
	09+09+18	18+18+18	07+09+09+24	09+09+12+12		07+07+09+12+15	09+09+09+09+18	
	09+09+24		07+09+12+12	09+09+12+15		07+07+09+12+18	09+09+09+12+12	

MULTI-ZONE SYSTEMS

AHRI CERTIFIED REF #	MODEL	INDOOR TYPE	EER	SEER	HSPF
202522139	4MXL36TVJU	Ducted Indoor Units	11	16.9	9.1
202521824	4MXL36TVJU	Non-Ducted Indoor Units	12.5	21.7	11.2
202522140	4MXL36TVJU	Mixed Ducted and Non-Ducted Indoor units	11.75	19.3	10.15
201851576	3MXS24RMVJU	Ducted Indoor Units	9.7	14	8.2
201851575	3MXS24RMVJU	Non-Ducted Indoor Units	12.7	18	12.5
201851581	3MXS24RMVJU	Mixed Ducted and Non-Ducted Indoor Units	11.2	15.95	10.35
201851580	4MXS36RMVJU	Ducted Indoor Units	7.9	14	8.2
201851579	4MXS36RMVJU	Non-Ducted Indoor Units	9.2	17.7	12.2
201851583	4MXS36RMVJU	Mixed Ducted and Non-Ducted Indoor Units	8.55	15.85	10.2
202638702	5MXS48TVJU	Ducted Indoor Units	8.6	15.3	8.6
202638701	5MXS48TVJU	Non-Ducted Indoor Units	10.5	20.2	11.1
202650862	5MXS48TVJU	Mixed Ducted and Non-Ducted Indoor Units	9.55	17.75	9.85
5731241	RMXS48LVJU	Ducted Indoor Units	9.3	14.1	9.6
5731240	RMXS48LVJU	Non-Ducted Indoor Units	10.3	18.8	11.3