

Inverter Driven Heat Pump

12,000 BTU Single Zone High SEER Wall Mounted System

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

- Auto Changeover
- 24 hr. Timer
- Auto Louver: Up/Down
- Minimum Heat Mode
- Wireless Remote control
- Auto Restart
- Economy Mode
- Auto Fan Mode



Heating down to -15°F outdoor temperatures



MODEL NUMBERS

Indoor Unit	ASUH12LMAS
Outdoor Unit	AOUH12LMAH1
System	12LMAH1

EFFICIENCIES

SEER	23
EER	12.5
HSPF	12.5
COP	12.5

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	°F(°C)	14 to 115 (-10 to 46)
Heating		-15 to 75 (-26 to 24)

CAPACITIES

	Rated	Min.—Max.	BTU/hW
Cooling			12,000
			3,400—13,300
Heating			16,000
			2,800—19,100

LINESET REQUIREMENTS

Connection Method	Flare	
Liquid	in (mm)	Ø 1/4 (Ø 6.35)
Gas		Ø 3/8 (Ø 9.52)
Pre-Charge Length		49 (15)
Minimum Length	ft (m)	10 (3)
Maximum Length		66 (20)
Max. Height Diff.		49 (15)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	10-5/8 x 32-13/16 x 8-3/4
	mm	(270 x 834 x 222)
Gross (H x W x D)	in	10-7/8 x 36 x 13-1/16
	mm	(277 x 914 x 332)
Net Weight	lb (kg)	22 (10)
Gross Weight		29 (13)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	21-5/16 x 31-7/16 x 11-7/16
	mm	(542 x 799 x 290)
Gross (H x W x D)	in	23-11/16 x 37 x 14-3/4
	mm	(602 x 940 x 375)
Net Weight	lb (kg)	73 (33)
Gross Weight		79 (36)



Indoor Unit ETL#: 91987
 Outdoor Unit ETL#: 91987

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTY-TTRX	3rd Party Thermostat Converter
UTY-TWRXZ2	Interface Kit
UTY-RNRUZ4	Wired Remote Controller (Touch Panel)
UTY-RSRY	Simple Remote Control
UTY-TFSXF1	WiFi Interface Module
UTY-XWZXZ5	Dry Contact Wire Kit



This system combination is Energy Star qualified



+App available in Apple® App Store and Google® Play Store.

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://portal.fujitsugeneral.com>

Effective Date: 12/17/2020

Version 12LMAH1 -2020A

Inverter Driven Heat Pump

12,000 BTU Single Zone High SEER Wall Mounted System

FAN DATA

Indoor Unit Airflow Rate	Cooling	High	CFM (m3/h)	453 (770)
		Medium		353 (600)
		Low		265 (450)
		Quiet		147 (250)
	Heating	High		453 (770)
		Medium		377 (640)
		Low		306 (520)
		Quiet		182 (310)
Outdoor Unit Airflow Rate	Cooling		1,065 (1,810)	
	Heating		1,065 (1,810)	

SOUND PRESSURE

Indoor Unit	Cooling	High	dB (A)	43
		Medium		36
		Low		30
		Quiet		19
	Heating	High		43
		Medium		38
		Low		33
		Quiet		21
Outdoor Unit	Cooling		49	
	Heating		51	

REFRIGERANT

Type	R410A		
Charge	lb oz	2lb.3oz.	
	kg	1	
Oil Type	POE (RB68A)		

ELECTRICAL SPECIFICATIONS


Voltage/Frequency/Phase		208/230 V / 1Ø / 60Hz		
Voltage Range		187-253V~60HZ		
Current	Cooling	Rated	A	4.7
	Heating	Rated		6
Maximum Operating Current	Cooling			6.9
	Heating			9.4
Starting Current		6		
MCA		12.5		
Maximum Circuit Breaker		15		
Input Power	Cooling	Rated	kW	0.96
		Min.—Max.		0.14—1.27
	Heating	Rated		1.28
Power Factor	Cooling	Min.—Max.	%	0.14—1.67
	Heating			88.8
				92.8

OTHER

Moisture Removal	pints/h (L/h)	3.8 (1.8)
Energy Star		Yes
Drain hose	Material	PP+HDPE
Size	in (mm)	Ø17/32 (Ø 13.8) (I.D.), Ø19/32 to 21/32 (Ø 15.0 to 16.8) (O.D.)
	Operation Range	
Cooling	°F (°C)	64 to 90 (18 to 32)
	%RH	80 or less
Heating	°F (°C)	60 to 86 (16 to 30)

Wall Bracket Data:

Units: In. (mm)


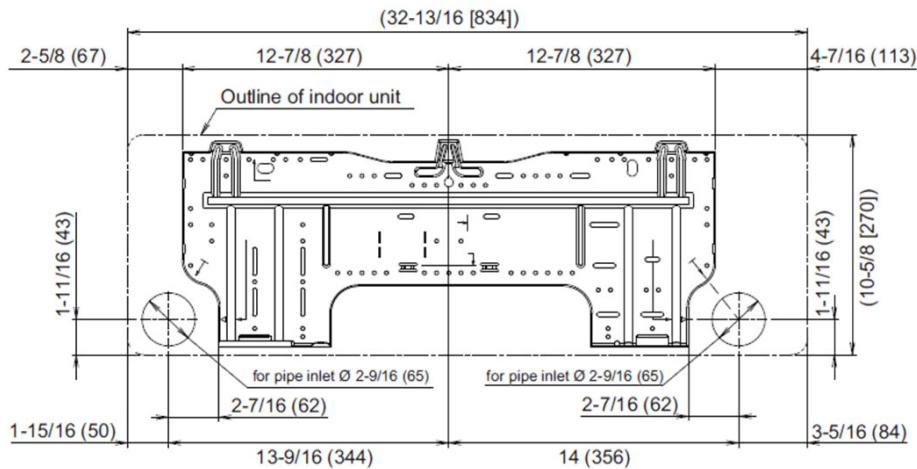


The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.


Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).

DIMENSIONS

Units: In. (mm)

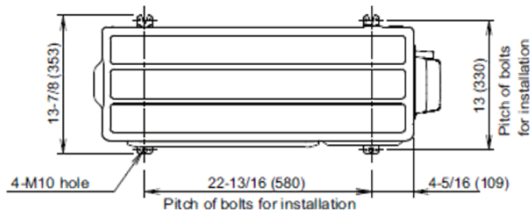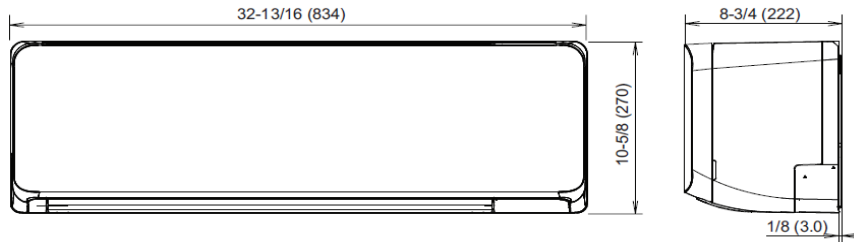


Top view

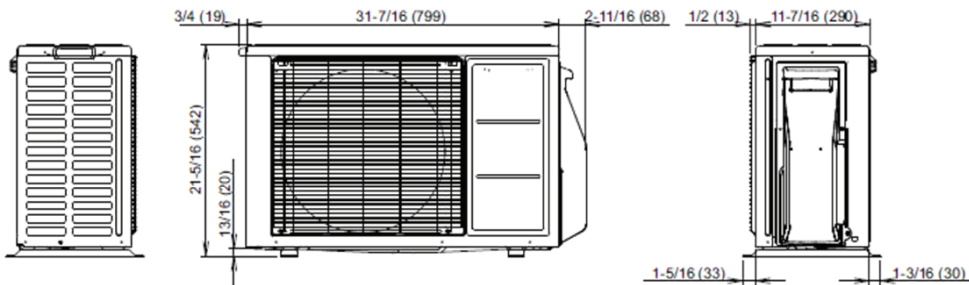


Side view

Front view

Side view

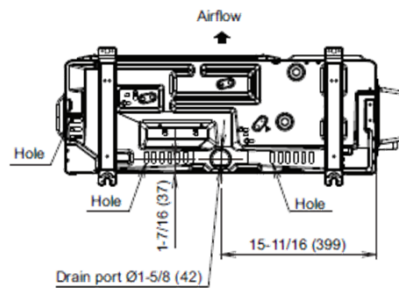

Bottom view



Side view (Valve part)

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).