

Inverter Driven Heat Pump

9,000 BTU Single Zone High SEER Wall Mounted System

Job Name _____
 Location _____
 Engineer _____
 Submitted To _____
 Submitted By _____
 Reference _____

Date _____
 Approval _____
 Construction _____
 Unit No _____
 Drawing No _____

PRODUCT FEATURES

- Auto Changeover
- 24 hr. Timer
- Auto Louver: Up/Down
- Minimum Heat Mode
- Wireless Remote control
- Auto Restart
- Economy Mode
- Auto Fan Mode



MODEL NUMBERS

Indoor Unit	ASUG09LMA51
Outdoor Unit	AOUG09LMA51
System	09LMA51

EFFICIENCIES

SEER	26.5
EER	14.3
HSPF	13
COP	14.3

OUTDOOR TEMPERATURE OPERATION RANGE

Cooling	*F(°C)	14 to 115(-10 to 46)
Heating		5 to 75(-15 to 24)

CAPACITIES

	Rated	BTU/hw	
Cooling	Rated		9,000
	Min.-Max.		3,400-10,900
Heating	Rated		12,000
	Min.-Max.		2,800-15,000

LINESET REQUIREMENTS

Connection Method		Flare
Liquid	in (mm)	Ø 1/4 (Ø 6.35)
	Gas	Ø 3/8 (Ø 9.52)
Pre-Charge Length	ft (m)	49 (15)
Minimum Length		10 (3)
Maximum Length		66 (20)
Max. Height Diff.		49 (15)

INDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	10-5/8 x 32-13/16 x 8-3/4
	mm	270 x 834 x 222
Gross (H x W x D)	in	10- 14/16 x 36 x 13- 1/16
	mm	277 x 914 x 332
Net Weight	lb (kg)	22 (10)
Gross Weight		29 (13)

OUTDOOR DIMENSIONS & WEIGHT

Net (H x W x D)	in	21-5/16 x 31-7/16 x 11-7/16
	mm	542 x 799 x 290
Gross (H x W x D)	in	23- 11/16 x 37 x 14- 12/16
	mm	602 x 940 x 375
Net Weight	lb (kg)	68 (31)
Gross Weight		75 (34)



Indoor Unit ETL#: 91987
 Outdoor Unit ETL#: 91987

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES

UTY-TTRX	3rd Party Thermostat Converter
UTY-TWRXZ2	Interface Kit
UTY-RNRUZ2	Wired Remote Controller (Touch Panel)
UTY-RSRY	Simple Remote Control
UTY-TFSXF1	WiFi Interface Module
UTY-XWZXZ5	Dry Contact Wire Kit



This system combination is Energy Star qualified



+App available in
 Apple® App Store and
 Google® Play Store.

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://portal.fujitsugeneral.com>

Inverter Driven Heat Pump

9,000 BTU Single Zone High SEER Wall Mounted System

FAN DATA

Indoor Unit Airflow Rate	Cooling	High	CFM (m3/h)	453 (770)
		Medium		353 (600)
		Low		264 (450)
		Quiet		147 (250)
	Heating	High	453 (770)	
		Medium	376 (640)	
		Low	306 (520)	
		Quiet	182 (310)	
Outdoor Unit Airflow Rate	Cooling		912 (1,550)	
	Heating		912 (1,550)	

SOUND PRESSURE

Indoor Unit	Cooling	High	dB (A)	43
		Medium		36
		Low		30
		Quiet		19
	Heating	High	43	
		Medium	38	
		Low	33	
		Quiet	21	
Outdoor Unit	Cooling		46	
	Heating		48	

REFRIGERANT

Type	R410A		
Charge	lb oz	2lb.2oz.	
	kg	1	
Oil Type	POE (RB68A)		

ELECTRICAL SPECIFICATIONS


Voltage/Frequency/Phase		208/230 V / 1Ø / 60Hz	
Voltage Range		187-253V-60HZ	
Current	Cooling	Rated	3.1
	Heating	Rated	4
Maximum Operating Current	Cooling	A	6.4
	Heating		7.9
Starting Current			4
MCA			9.7
Maximum Circuit Breaker			15
Input Power	Cooling	Rated	0.63
		Min.-Max.	0.14-0.92
Power Factor	Heating	Rated	0.84
		Min.-Max.	0.14-1.61
Power Factor	Cooling	%	88.4
	Heating		91.3

OTHER

Moisture Removal	pints/h (L/h)	2.7 (1.3)	
Energy Star		Yes	
Drain hose	Material	PP+HDPE	
Size	in (mm)	Ø15/32 (Ø11.8) (I.D.), Ø19/32 to Ø21/32 (Ø15 to Ø16.8) (O.D.)	
	Operation Range	Cooling °F (°C)	64 to 90 (18 to 32)
		%RH	80 or less
	Heating °F (°C)		60 to 86 (16 to 30)

Wall Bracket Data:

Units: In. (mm)


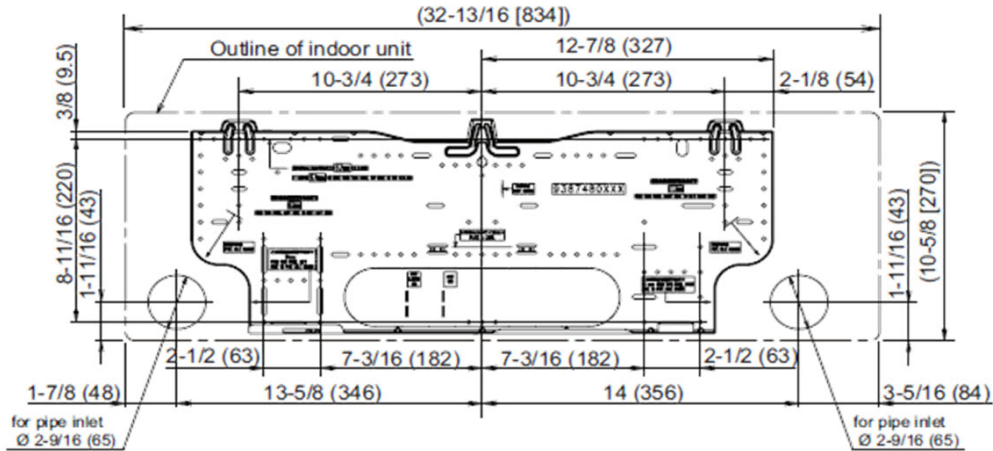


The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.


Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).

DIMENSIONS


Units: In. (mm)

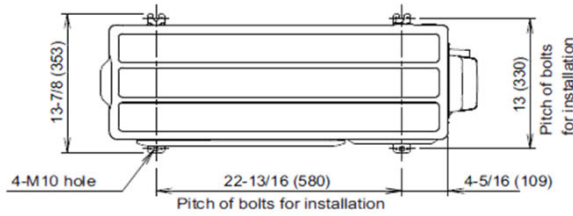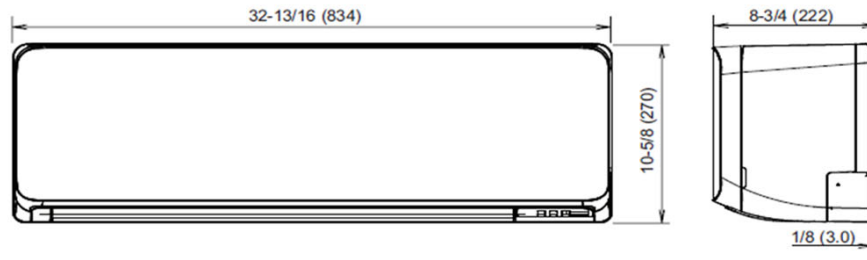


Top view




Side view

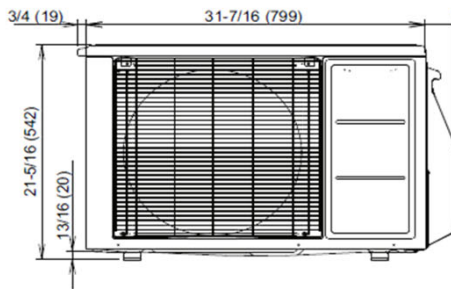


Front view

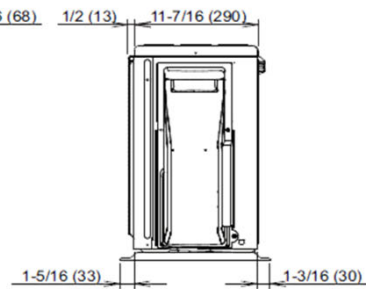

Side view

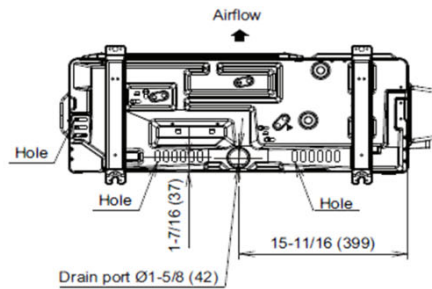

Bottom view



Side view (Valve part)

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).