

Multi zone inverter mini split

TOSOT

MODEL: TM09HEDI

Project Name:

Engineer Name:

Unit Designation:

Submitted To:

Date:

Location:

Purchaser:

Schedule No.

General Features

- 2 Thermistor control
- 24-Hour on/off Timer
- Auto operation
- Auto restart
- Chaos swing
- Control lock function
- Drain Pump



- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection
- Wireless Remote control
- Optional Wired controller

Unit Performance:

Nominal Cooling Capacity (Btu/h)	9,000
Nominal Heating Capacity (Btu/h)	9,500

Set Temperature

Cooling (°F)	61~86
Heating (°F)	61~86

Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	3/8
Drain OD (in)	1.1

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 14/4
Rated Amps (A)	0.14

Fan

Type	Centrifugal
Quantity	1
Motor/Drive	Direct Drive
Air Flow Rate (CFM)	382/330/312/282/253/218/188

Unit Specification

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure (dB(A))	40/38/36/33/30/26/25
Primary Filter	Yes
Net Weight (lbs)	33
Dehumidification (Pt/h)	1.69



GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection


MCA - Minimum Circuit Ampacity

Multi zone inverter mini split

TOSOT

MODEL: TM09HEDI

Outline Dimension Diagram

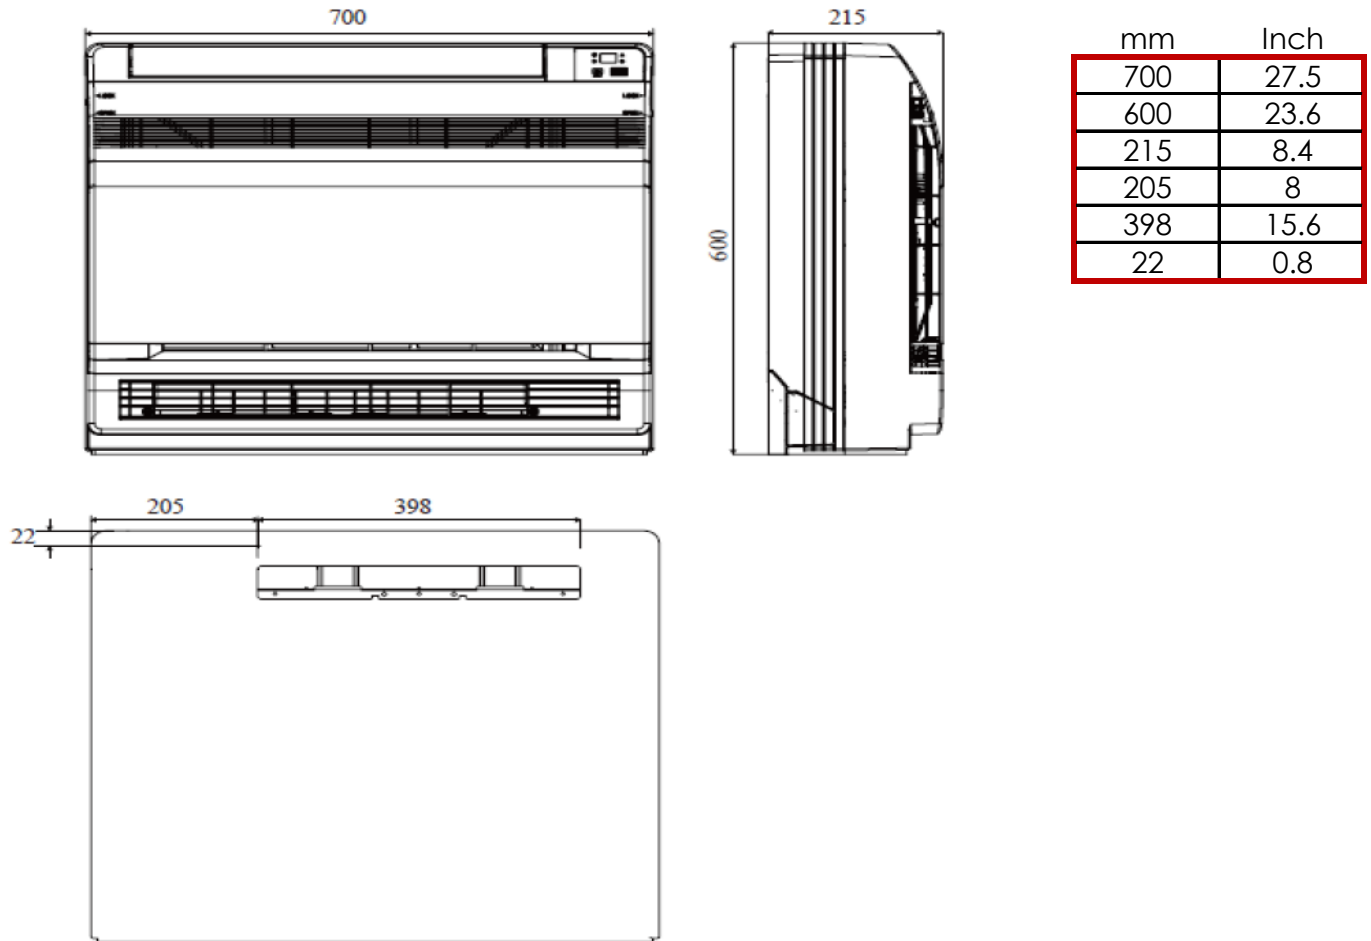

Approved By:

Signature

Date

TOSOT

315 Boulevard Industriel, Châteauguay, QC, Canada J6J 4Z2
Contact: +1 (450) 698-4000
info@tosotamerica.com
tosotamerica.com